


Table - A Length Tolerance

| Length | Min | Max |
|--------------------------------|-----|---------------|
| Less than 3" (76mm) | -0 | +3.5" (90mm) |
| From 3" (76mm) to 48" (1219mm) | -0 | +6" (152mm) |
| 50" (1270mm) or Longer | -0 | +1% of Length |

SC END VIEW


LC END VIEW

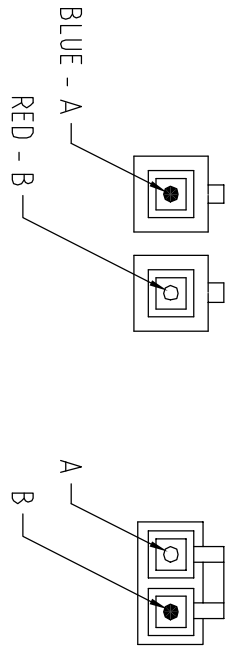

16 LC - SC POLARITY DIAGRAM
2 STANDARD A - B CONFIGURATION

16 LC - SC PATCHCORD
1 NOT TO SCALE
POLYMER CONNECTORS

- A ACTUAL ASSEMBLY DETAILS MAY DIFFER SLIGHTLY FROM THE DRAWING REPRESENTATION.
- B EXACT FIBER MARKING AND MARKING ORIENTATION IS SHOWN FOR REFERENCE ONLY AND IS UNSPECIFIED. HOWEVER, FIBER CORE AND CL RATING WILL ALWAYS BE LISTED
- C BARCODE LABEL IS PRINTED WITH FEA SERIAL NUMBER IN I-2645 FORMAT, AND INCLUDES HUMAN READABLE TEXT.
- D STRAIN RELIEF BOOTS WHICH ARE NOT OVERMOLDED WILL BE ADHERED TO CONNECTOR CRIMP AND FIBER JACKET AND ARE NOT INTENDED TO BE REMOVABLE.



| LT | REV | DESCRIPTION | DATE | BY | CHK | APP | SCALE | REV |
|----|-----|--|------|----|-----|-----|-------|-----|
| 1 | 1 | ORANGE DUPLEX, PVC ZIPCORD, 62.5/125um | | | | | | |
| 2 | 1 | LC CERAMIC DUPLEX CONNECTOR | | | | | | |
| 3 | 1 | SC POLYMER OVERMOLDED CONNECTOR | | | | | | |

| REV | DATE | DESCRIPTION | BY | CHK | APP | SCALE | REV |
|-----|-------|------------------------------------|----|-----|-----|-------|-----|
| 1 | 12/12 | INSTALL SHROUD COLORS AS INDICATED | | | | | |

| | |
|---------|--|
| NAME | LC - SC POLY DUPLEX 62.5/125um PATCHCORD |
| SCALE | N/A |
| PART NO | V6C2P2xxM |
| SHEET | 18 of 60 |
| REV | A |