



GUARD DOG®

CABLE PROTECTORS

3 & 5 CHANNEL SYSTEMS


GUARD DOG® 3 & 5 CHANNEL PROTECTORS WITH DOG BONE CONNECTORS

The fast and easy way to guard and protect valuable electrical cables and hose lines from damage and abuse while providing a method of safe crossing for vehicle and pedestrian traffic. Each cable/hose line is separated and organized in its own protective channel to ensure safety. Ideal for use in public, commercial and industrial applications where cable protection is required.

MODEL	DESCRIPTION	A-LENGTH	B-WIDTH	C-HEIGHT	D-CHANNEL WIDTH*	E-CHANNEL HEIGHT	WEIGHT
GD5X125	5-Channel Protector	36 in. (914.4 mm)	19.75 in. (501.7 mm)	1.875 in. (47.6 mm)	1.339 in. (34.0 mm)	1.325 in. (33.65 mm)	21.0 lbs. (9.6 kg)
GDEC5X125 (Pair Only)	5-Ch. End Caps (female) (male)	female 8.75 in. male 5.25 in.	19.75 in. (501.7 mm)	1.875 in. (47.6 mm)	1.339 in. (34.0 mm)	1.325 in. (33.65 mm)	6.0 lbs. (2.8 kg)
GDT5X125R	45° Right Turn	24.5 in. (622.3 mm)	19.75 in. (501.7 mm)	1.875 in. (47.6 mm)	1.339 in. (34.0 mm)	1.325 in. (33.65 mm)	11.0 lbs. (5.0 kg)
GDT5X125L	45° Left Turn	24.5 in. (622.3 mm)	19.75 in. (501.7 mm)	1.875 in. (47.6 mm)	1.339 in. (34.0 mm)	1.325 in. (33.65 mm)	11.0 lbs. (5.0 kg)
GDCR5X125	4-Way Cross	A = 28.5 in. A2 = 24.5 in.	19.75 in. (501.7 mm)	1.875 in. (47.6 mm)	1.339 in. (34.0 mm)	1.325 in. (33.65 mm)	23.1 lbs. (10.5 kg)
GD3X225	3-Channel Protector	36 in. (914.4 mm)	20 in. (510 mm)	3 in. (76.5 mm)	2.25 in. (58.0 mm)	2.25 in. (58.0 mm)	30 lbs. (13.6 kg)


Protector Color: O/B = Orange Lid with Black Ramps • B/B = Black Lid with Black Ramps • End Cap: Orange

Dog Bone Connectors compatible with protectors you may already have.

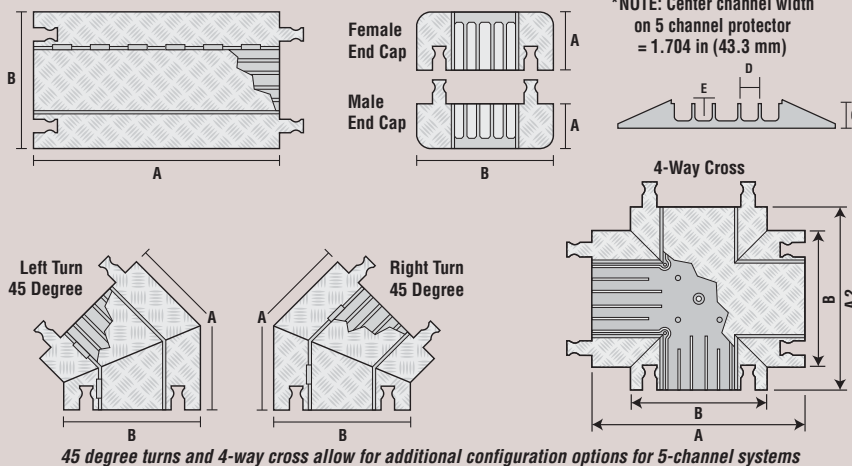


45 degree turns and 4-way cross allow for additional configuration options for 5-channel systems


SPECIFICATION DATA		LOAD CAPACITY PER TIRE/AXLE			
Material	Operating Temp	Channels	Max Load 70° F (21° C)		
Polyurethane (UV stabilized)	-40° F to 120° F (-40° C to 48° C)	5	10,500 lbs./Tire (4,763 kg)		
Hinge Pin Material	Reinforced fiberglass	3	14,210 lbs./Tire (6,446 kg)		
Safety Symbols	Per ANSI Z535.3-1991		28,420 lbs./Axle (12,892 kg)		

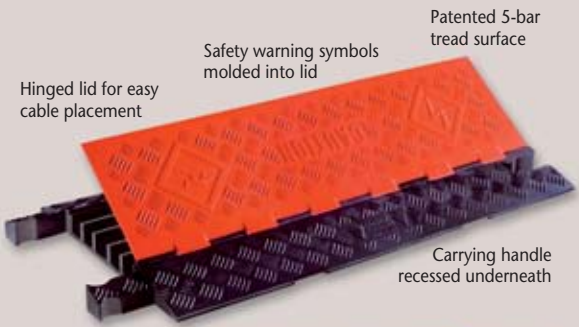

Heavy duty "Dog Bone" connectors

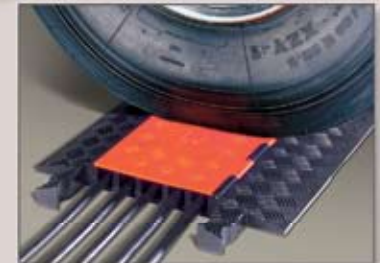

Guard Dog® 5 Channel - protects cable and hose lines up to 1.3 in. outside diameter

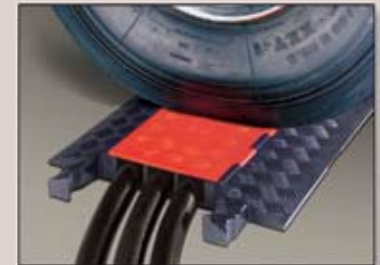

Guard Dog® 3 Channel - protects cable and hose lines up to 2.25 in. outside diameter



4-Way Cross allows for additional configuration options.



Guard Dog® with ADA Ramps



Guard Dog® provides safety and protection



Guard Dog® with ADA Ramps and Rails