

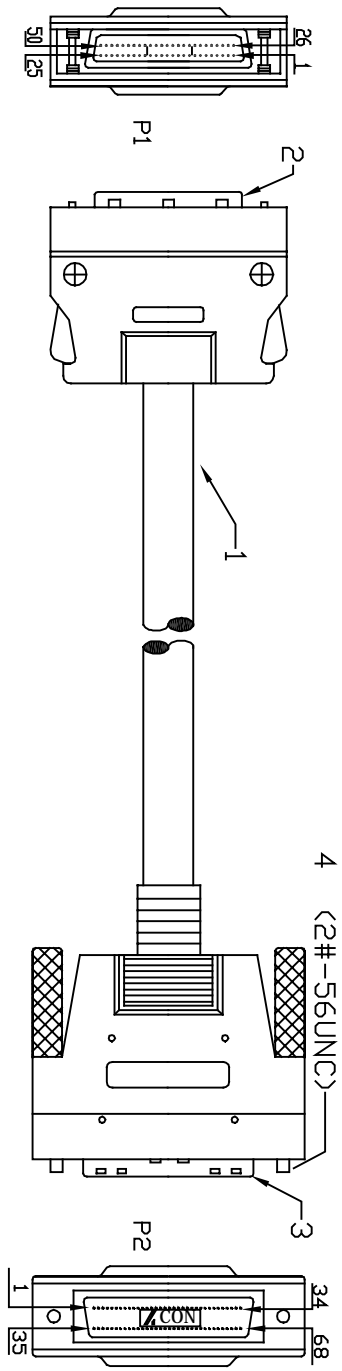


REVISIONS		
REV	DESCRIPTION	APPROVED

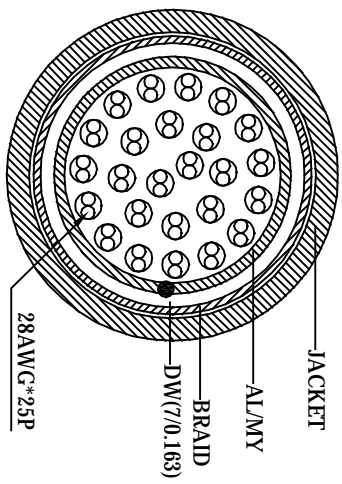

P1 HPDB 50 PM

P2 HP DB 68PM



NOTES:

- 1. MOLDED CONNECTOR END REQUIREMENTS:
- A. INNER MOLD USING PE
- B. COPPER FOIL WRAP AND 360° SOLDER TO CONNECTOR
- C. PVC - 45P PLATINUM GRAY
- 2. CABLE: 28AWG(7/0.127)*25P+AL/MY+DW(7/0.163) +85%BD(24/10/0.12)TTN
- INSULATION: PP OD = ϕ 0.62 ± 0.05MM
- COLOR: P1 COLOR CODE
- JACKET: 80°C PVC, OD = ϕ 8.0 ± 0.20MM
- COLOR: PLATINUM GRAY
- 3. FINISHED PRODUCTS LENGTH:

- (1) LENGTH=914mm TOLERANCE: ±25.4mm
- (2) LENGTH=1219mm TOLERANCE: ±25.4mm
- (3) LENGTH=1829mm TOLERANCE: ±25.4mm

		PIN		OUTS	
P1	P2	COLOR	P1	P2	COLOR
1	6	WHITE	26	40	WHITE/BLACK
2	7	YELLOW	27	41	YELLOW/BLACK
3	8	RED	28	42	RED/BLACK
4	9	BROWN	29	43	BROWN/WHITE
5	10	L-BLUE	30	44	L-BLUE/BLACK
6	11	L-BLUE/GREEN	31	45	L-BLUE/YELLOW
7	12	GREEN	32	46	GREEN/BLACK
8	13	BLUE	33	47	BLUE/WHITE
9	14	PINK	34	48	PINK/BLACK
10	15	PURPLE	35	49	PURPLE/WHITE
11	16	GRAY	36	50	GRAY/BLACK
12	17	ORANGE	37	51	ORANGE/BLACK
13	18	PINK/WHITE	38	52	PINK/YELLOW

INSULATION	UPON 1M ohm	AND 1M ohm	ELECTRIC CONDUCTION	INSIDE 1.5K ohm
4	THUMSCREW: 6*57mm	NICKEL-PLATING	2PCS	
3	CONNECTOR: HPDB 68P MALE	NICKEL-PLATING	1SET	
2	CONNECTOR: HPDB 50P MALE	NICKEL-PLATING	1SET	
1	CABLE: 28P		1PCS	

PRDDUCT		HPDB 50MALE TO HPDB 68MALE		CUSTOMER		DRAWN		HYON .W	
CUS,ND		5352-XXX		VERSION		CHECKED		Jackson Cang	
DR,ND		SD5352-XXX		DRAWN DATE		OCT.14.2000		APPROVERD	
								Jonny Chuang	
JDI TECHNOLOGIES				THREE ANGLE PROJECTION					