


PIN				OUTS			
A 26PM	B 37PM	PAIR	COLOR	A 26PM	B 37PM	PAIR	COLOR
01	06	1	BROWN	10	27	9	WATHET BLUE
14	24		BRWDN/WHITE	11	09		WATHET BLUE/BLACK
02	17	2	RED	12	11	10	ORANGE
15	35		RED/BLACK	25	29		ORANGE/BLACK
03	05	3	YELLOW	13	10	11	PURPLE
16	23		YELLOW/BLACK	26	37		PURPLE/WHITE
04	08	4	GREEN	22	19	12	WATHET BLUE/YELLOW
17	26		GREEN/BLACK	24	20		WATHET BLUE/GREEN
05	04	5	BLUE	shield	01	12.5	BLACK
18	22		BLUE/WHITE				
06	13	6	GRAY	shield	shield		
19	31		GRAY/BLACK				
07	12	7	WHITE				
20	30		WHITE/BLACK				
08	07	8	PINK				
09	25		PINK/BLACK				

ITEM NO	PART NAMES	Q'TY	REMARK
1	CABLE: UL2919 28AWG LIGHT BLUE 12.5P OD=7.4±0.15mm	1PCS	
2	CONNECTOR:HPN26P MALE NICKEL-PLATING, INSULATOR COLOR:WHITE	1PCS	
3	CONNECTOR:DB37P MALE NICKEL-PLATING-TIN, INSULATOR COLOR:BLACK	1PCS	
4	SCREW: 4*47mm NICKEL-PLATING	2PCS	
5	SCREW: 5*47.7mm *X"CUT A DVTRE.	2PCS	

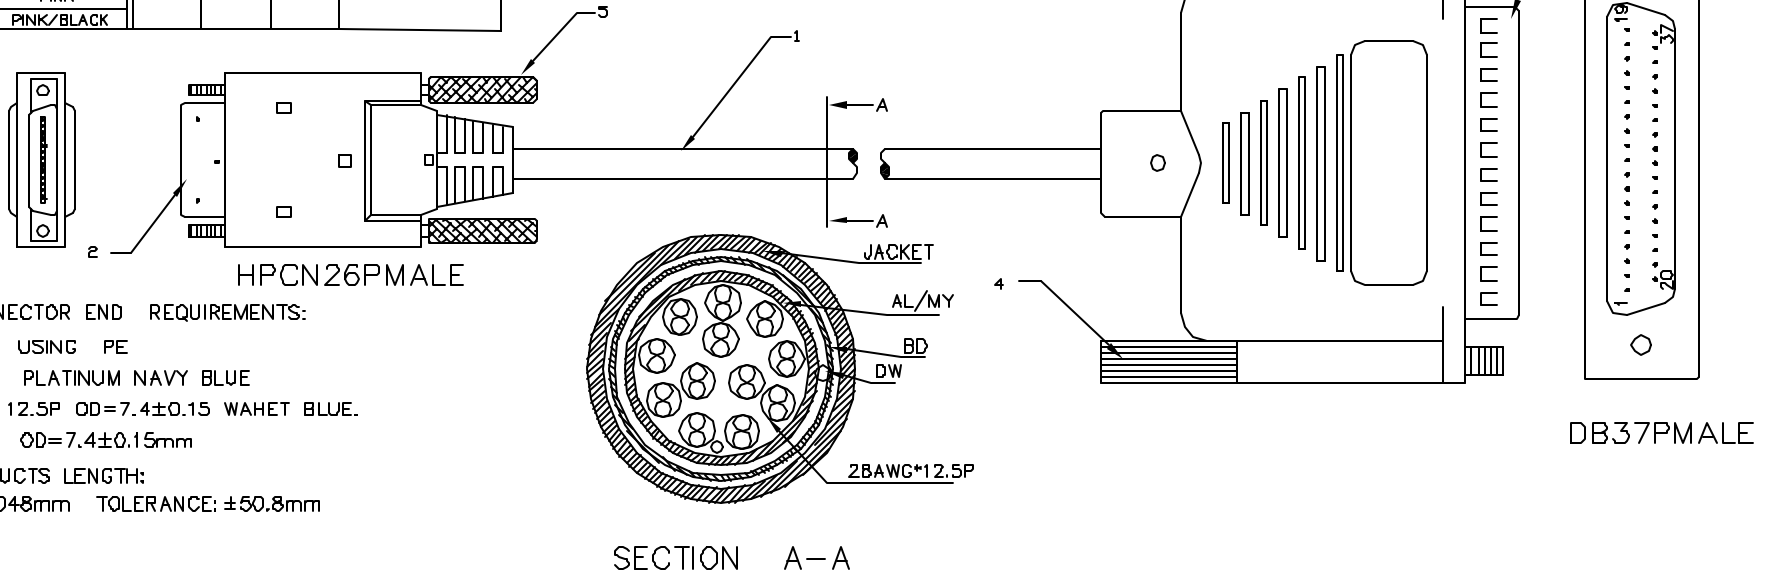

NOTES:

1.MOLDED CONNECTOR END REQUIREMENTS:

A:INNIR MOLD USING PE

B:PVC - 45P PLATINUM NAVY BLUE

2.CABLE:UL2919 12.5P OD=7.4±0.15 WAHET BLUE.

JACKET: PVC OD=7.4±0.15mm

3.FINISHED PRODUCTS LENGTH:

(1) LENGTH=3048mm TOLERANCE: ±50.8mm

SECTION A-A

?
?
?
?

JDI TECHNOLOGIES	PRODUCT	HPCN26M TO DB37M	CUSTOMER	JDI	DRAWN	Elan Xie	 THREE ANGLE PROJECTION
	CUS.NO	SS449MT-10	VERSION	ONE	CHECKED	Jackson Cang	
	DR.NO	SDSS449MT-10	DRAWN DATE	26.03.2001	APPROVED	Eric Lee	